

EE660

Low Air Velocity Sensor

The EE660 is optimized for highly accurate measurement of very low air velocity in laminar flow control and special ventilation applications, for instance in clean rooms.

Excellent Measurement Performance

The E+E thin film sensing element employed in EE660 operates on the hot film anemometer principle, which stands for excellent accuracy down to 0.15 m/s (30 ft/min), high insensitivity to pollution and low angular dependency.

Analogue and Digital Outputs

The air velocity measured data is available as current and voltage outputs, on the RS485 interface with Modbus RTU or BACnet protocol, as well as on the optional display.

Easy Configuration and Adjustment

The EE660 is user configurable with jumpers on the electronics board or via software. An optional configuration adapter and the free EE-PCS Product Configuration Software facilitate the adjustment of EE660 and the display setup.



Features

Display

- » Large, easily readable
- » With backlight
- » 180° rotatable

Smooth cover surface

- » No accumulation of dust in protruding edges

Electronics on the underside of the board

- » Optimum protection against mechanical damage during installation

E+E sensing element

- » Excellent accuracy
- » Long-term stability
- » Low sensitivity to pollution
- » Low angular dependency

Appropriate for US mounting requirements

- » Knock-out for 1/2" conduit fitting

External mounting holes

- » Easy and fast mounting with closed cover
- » Electronics protected against construction site pollution


Bayonet screws

- » Open/closed with a 1/4 rotation

Adjustment configuration

- » Measuring range
- » Response time
- » RS485 Setup
- » Termination resistor

Test report according DIN EN 10204 - 2.2

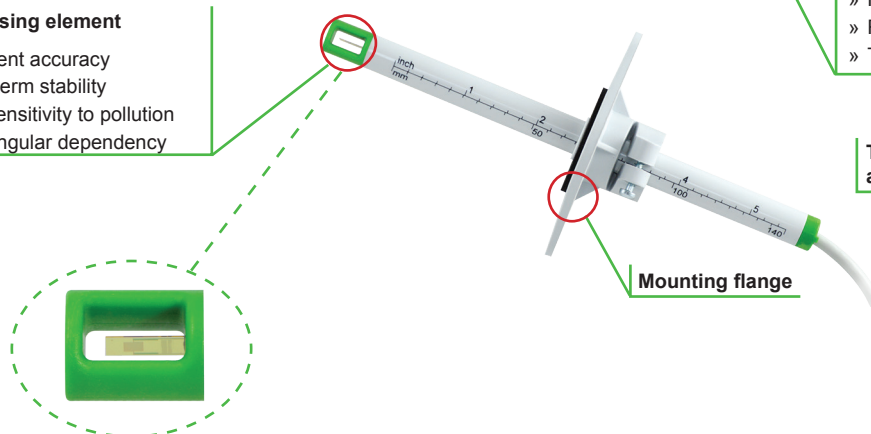

Technical Data


Measurand

Working range ¹⁾	0...1 m/s	(0...200 ft/min)	
	0...1.5 m/s	(0...300 ft/min)	
	0...2 m/s	(0...400 ft/min)	
Accuracy at 20 °C ²⁾ (68 °F), 45 % RH, 1013 hPa	0.15...1 m/s	(30...200 ft/min)	± (0.04 m/s (7.9 ft/min) + 2 % of mv)
	0.15...1.5 m/s	(30...300 ft/min)	± (0.05 m/s (9.8 ft/min) + 2 % of mv)
	0.15...2 m/s	(30...400 ft/min)	± (0.06 m/s (11.8 ft/min) + 2 % of mv)
Response time τ_{90} ³⁾	typ. 4 sec or typ. 1 sec (at constant temperature)		

Output

Analogue	0 - 10 V	and	4 - 20 mA
0...1 m/s / 0...1.5 m/s / 0...2 m/s ¹⁾	-1 mA < I _L < 1 mA		R _L < 450 Ω (linear, 3-wires)
Digital interface	RS485 with max. 32 devices on one bus		
Protocol	Modbus RTU or BACnet MS/TP		



General

Power supply (Class III) 	24 V AC/DC ± 20 %			
Current consumption (max.)	AC supply - no display	DC supply - no display	AC supply - with display	DC supply - with display
	Analogue output	74 mA rms	41 mA	180 mA rms
	Digital output	120 mA rms	50 mA	-
Angular dependence	< 3% of the measured value at $ \Delta\alpha < 10^\circ$			
Electrical connection	screw terminals max. 1.5 mm ² (AWG 16)			
Cable gland	M16x1.5			
Electromagnetic compatibility	EN61326-1		EN61326-2-3	
	Industrial Environment			
Housing material	Polycarbonate, UL94V-0 (with Display UL94HB) approved			
Protection class	Enclosure IP65 / NEMA4, remote probe IP20			
Temperature range	working temperature probe	-25 ... +50 °C (-13...122 °F)		
	working temperature electronic	-10 ... +50 °C (14...122 °F)		
	storage temperature	-30 ... +60 °C (-22...140 °F)		
Working range humidity	5...95 % RH (non-condensing)			



- 1) Selectable by jumper, only for analogue output
2) The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor k=2 (2-times standard deviation).
The accuracy was calculated in accordance with EA-4/02 and with regard to GUM (Guide to the Expression of Uncertainty in Measurement).
3) Selectable by jumper (analogue) and slide switch (digital)

Dimensions mm (inch)

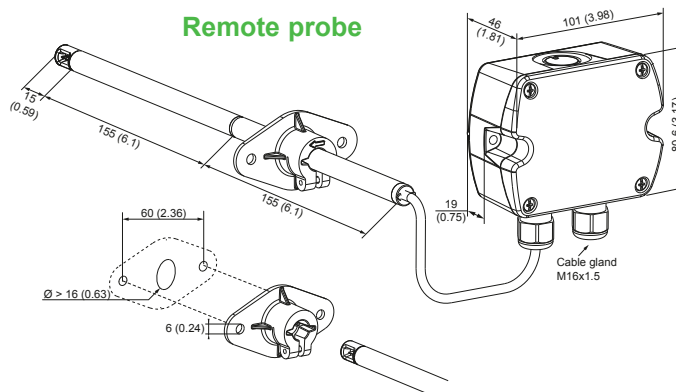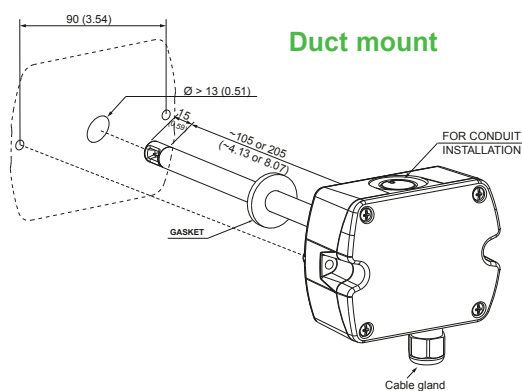

Ordering Guide

		EE660-	
Configuration	Model	duct mount remote probe	T2 T3
	Output	0-10 V and 4-20 mA RS485	A7 J3
	Probe length	100 mm (3.94") 200 mm (7.88") 300 mm (11.82")	L100 L200 L300
	Cable length	1 m (3.3 ft) 2 m (6.6 ft) 5 m (16.4 ft) 10 m (32.8 ft)	K1 K2 K5 K10
	Display	no display with display (only for analogue output A7)	no code D2
	Display unit	m/s ft/min	no code DA21
Setup RS485	Protocol	Modbus RTU ¹⁾ BACnet MS/TP ²⁾	P1 P3
	Baud rate	9600 19200 38400 57600 ³⁾ 76800 ³⁾	BD5 BD6 BD7 BD8 BD9

1) Factory setting: Even Parity, Stopbits 1

2) Factory setting: No Parity, Stopbits 1

3) Only for BACnet MS/TP

Modbus Map see User Guide at www.epluse.com/ee660

Product Implementation Conformance Statement (PICS) available at www.epluse.com/ee660

Order Examples

EE660-T3J3L300K1P1BD5

Model: remote probe
Output: RS485
Probe length: 300 mm (11.82")
Cable length: 1 m (3.3 ft)
Display: no display
Protocol: Modbus RTU
Baud rate: 9600

EE660-T2A7L200

Model: duct mount
Output: 0-10 V and 4-20 mA
Probe length: 200 mm (7.88")

Accessories

USB configuration adapter
Product configuration software
Power supply adapter

HA011066

EE-PCS (free download: www.epluse.com/EE660)

V03 (see data sheet Accessories)

Liên hệ tư vấn: [®]

✉ **han@ansgroup.asia**

☎ **0937.720.487**

YOUR PARTNER IN SENSOR TECHNOLOGY

E+E

ELEKTRONIK[®]
Ges.m.b.H.